

# Giselle


Fabric by Jessica Gonacha

Projects designed and  
pieced by Cyndi Hershey

Finished size of tablerunner: 14" x 46"

Finished size of bag: 10" x 11" x 4"

Finished size of pillow: 20" square



[www.redroosterfabrics.com](http://www.redroosterfabrics.com)

## PILLOW FABRIC REQUIREMENTS:


- A. Pattern #20432 – PIN1 ..... Fat Quarter  
 B. Pattern #20433 – PIN1 ..... Fat Eighth  
 C. Pattern #20435 – PIN1 ..... Fat Eighth  
 D. Pattern #20436 – PIN1 ..... Fat Eighth  
 E. Pattern #20437 – PIN1 ..... Fat Eighth  
 F. Pattern #20438 – PIN1 ..... 1/2 yard  
 G. Pattern #20439 – PIN1 ..... 1/4 yard

**Additional supplies:** 16" soft pillow form

## CUTTING INSTRUCTIONS:

Please read all instructions carefully before beginning. 1/4" seam allowance is included in measurements and all strips are cut across the width of the fabric unless noted otherwise. Cut fabrics in order given. Label all pieces and place in separate piles for each block or unit.

- A. Pattern #20432 – PIN1 (large floral):**  
 1. Cut one 10 1/2" square.
- B. Pattern #20433 – PIN1 (pink texture):**  
 1. : Cut one 3" x 15 1/2" strip.
- C. Pattern #20435 – PIN1 (grey blossoms):**  
 1. Cut one 3" x 13" strip.
- D. Pattern #20436 – PIN1 (brown/pink roses):**  
 1. Cut one 3" x 10 1/2" strip.
- E. Pattern #20437 – PIN1 (leafy vine):**  
 1. Cut one 3" x 13" strip.
- F. Pattern #20438 – PIN1 (small brown floral):**  
 1. Cut one 14" strip; subcut two 14" x 20 1/2" rectangles.  
 This is the backing of the pillow.
- G. Pattern #20439 – PIN1 (stripe):**  
 1. Cut two 3" x 15 1/2" strips and two 3" x 20 1/2" strips.



## PIECING INSTRUCTIONS:

1. Strips are sewn to the center [A] square in a clockwise order. Please refer to diagram & photo to add full round of strips. All strips are pressed away from the center square.
2. Flange: Sew a [G] 3" x 15 1/2" strip to both sides of pillow center. Sew a [G] 3" x 20 1/2" strip to top and bottom. Press all seams toward the flange.
3. Pillow Back: Sew a double 1/4" hem on one long side of both [F] backing rectangles. With right sides facing, pin raw edges of one backing rectangle to pillow front. Hemmed edge will face middle of pillow. Repeat with other rectangle so that backing pieces overlap. Sew around all sides with 1/4" seam. Trim corners at an angle to reduce bulk and turn pillow right side out through lapped opening. Press flat. From front of pillow, stitch in-the-ditch of the flange seam on all sides.
4. Insert 16" pillow form through lapped opening on back of pillow and work corners of form firmly into corners of pillow cover.

## TABLERUNNER FABRIC REQUIREMENTS:

- A. Pattern #20432 – PIN1 ..... Fat Quarter  
 B. Pattern #20433 – CRE1 ..... Fat Quarter  
 C. Pattern #20433 – PIN1 ..... Fat Eighth  
 D. Pattern #20434 – PIN1 ..... 1/2 yard  
 E. Pattern #20435 – PIN1 ..... Fat Eighth  
 F. Pattern #20436 – PIN1 ..... 3/8 yard  
 G. Pattern #20437 – PIN1 ..... Fat Quarter  
 H. Pattern #20439 – DKPIN ..... 1/8 yard


## CUTTING INSTRUCTIONS:

Please read all instructions carefully before beginning. 1/4" seam allowance is included in measurements and all strips are cut across the width of the fabric unless noted otherwise. Cut fabrics in order given. Label all pieces and place in separate piles for each block or unit.

- A. Pattern #20432 – PIN1 (large floral):**  
 1. Cut two 8 1/2" squares.
- B. Pattern #20433 – CRE1 (cream texture):**  
 1. Cut four 2" x 5 1/2" and four 2" x 8 1/2" rectangles.
- C. Pattern #20433 – PIN1 (pink texture):**  
 1. Cut two 2" x 5 1/2" and two 2" x 8 1/2" rectangles.
- D. Pattern #20434 – PIN1 (multicolor ellipse):**  
 1. Cut one 14 1/2" strip across width of fabric. Trim and discard selvages. This is the backing of the table runner.
- E. Pattern #20435 – PIN1 (grey blossoms):**  
 1. Cut one 5 1/2" square.
- F. Pattern #20436 – PIN1 (brown/pink roses):**  
 1. Cut one 3" strip; subcut two 3" x 14 1/2" strips.  
 2. Cut two 3" x 41 1/2" strips. (You should be able to get a strip across the width of the fabric. If not, cut another 3" strip. Join three strips together; press and cut two strips as noted.)
- G. Pattern #20437 – PIN1 (leafy vine):**  
 1. Cut two 5 1/2" squares. Cut two 3" x 14 1/2" strips.
- H. Pattern #20439 – DKPIN1 (stripe):**  
 1. Cut one 1" strip; subcut two 1" x 9 1/2" strips. Cut two 1" x 40 1/2" strips.

## PIECING INSTRUCTIONS:

- Center Block: Sew a [C] 3" x 5½" rectangle to opposite sides of the [E] 5½" square. Pay attention as Fabric E is directional. Sew a [C] 3" x 8½" rectangle to top and bottom of [E] square. Press all seams away from center.
- End Blocks: Sew a [B] 3" x 5½" rectangle to opposite sides of a [G] 5½" square. Pay attention as Fabric G is directional. Sew a [B] 3" x 8½" rectangle to top and bottom of [G] square. Press all seam away from center. Repeat to make two blocks.
- Refer to photo & diagram to assemble center block, two end blocks and two [A] 8½" squares. Press seams toward the [A] squares.
- Sew an [H] 1" x 40½" strip to both long sides of runner. Sew an [H] 1" x 9½" strip to both ends. Press all seams toward the [H] strips.
- Sew an [F] 3" x 41½" strip to both long sides of runner. Sew an [F] 3" x 14½" strip to both ends. Press all seams toward the [F] strips.

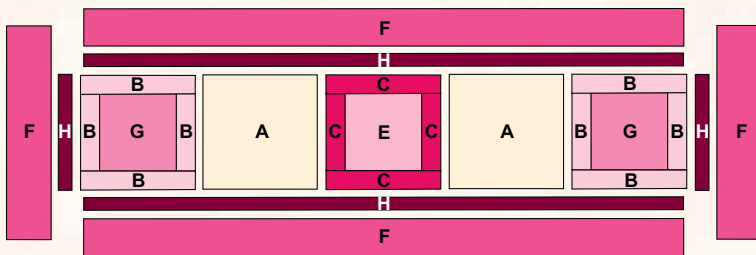

- Sew a [G] 3" x 14½" strip to both ends of the [D] 14½" backing rectangle. Press seams toward [G] strips. Trim pieced backing to measure 14½" x 46½" keeping [D] centered.
- With right sides facing, sew front and back of runner together leaving an opening along one long side. Turn right side out through opening. Press and topstitch around all sides ⅛" from outer edge closing opening as you sew. **NOTE:** If you prefer to add batting, cut a thin piece of batting the same size as the backing. Include as you sew this step.
- Stitch in-the-ditch around all blocks and in all border seams.

## TOTE BAG FABRIC REQUIREMENTS:

- A. Pattern #20435 – PIN1 .....¾ yard  
 B. Pattern #20438 – PIN1 .....7/8 yard  
 C. Pattern #20439 – DKPIN1.....¼ yard  
 D. 45" Fusible Fleece .....1 yard

## CUTTING INSTRUCTIONS:

Please read all instructions carefully before beginning. ¼" seam allowance is included in measurements and all strips are cut across the width of the fabric unless noted otherwise. Cut fabrics in order given. Label all pieces and place in separate piles for each block or unit.

### A. Pattern #20435 – PIN1 (grey blossoms):

- Cut one 11½" strip; subcut one 4½" x 11½" rectangle. Trim remaining strip to 10½" and cut two 10½" x 15½" rectangles.
- Cut one 6½" strip; subcut two 6½" x 14½" rectangles.

### B. Pattern #20438 – PIN1 (small brown floral):

- Cut one 11½" strip; subcut one 4½" x 11½" rectangle. Trim remaining strip to 10½" and cut two 10½" x 15½" rectangles.
- Cut one 12½" strip; subcut two 12½" x 15½" rectangles.
- Cut one 2½" strip for binding.

### C. Pattern #20439 – DKPIN1 (stripe):


- Cut two 3½" strips; trim selvages.

### D. Fusible Fleece:

- Cut two 10½" x 15½"; two 1¾" x width of fleece; two 6½" x 7¼" and one 4½" x 11½".


## PIECING INSTRUCTIONS:

- Bag front: Fuse one fleece 10½" x 15½" rectangle to wrong side of each [B] 10½" x 15½" rectangle, following manufacturer's directions. Quilt each fused rectangle as desired. Sample was quilted with vertical lines spaced 1½" apart. Sew fused rectangles together along short sides for front of bag. Press seams open using press cloth to protect iron.



**Note:** Seams will be on the sides of the bag.




- Outer pocket: Fuse one fleece 6½" x 7¼" to one end of each [A] 6½" x 14½" rectangle following manufacturer's directions. Fold [A] rectangles over in half with wrong sides together matching all raw edges; press. Quilt pockets as desired. Sample pockets were quilted with several horizontal lines. Referring to photo, center one pocket on each side of bag matching centers. Stitch both sides of both pockets close to raw edges.
- Straps: Fuse one fleece 1¾" strip to wrong side of [C] strip matching one long edge of strip to long edge of fleece.



Trim ends of fleece even with strip.

With right sides together, sew strips

along long edge leaving ends open. Turn right sides out through ends. (Using a large safety pin will help with turning tube.) Repeat for the second strip. Press tubes flat to form straps. Topstitch  $\frac{1}{8}$ " from long edges of both straps and once again through center of strips. Referring to photo, match raw ends of one strip to bottom of bag and pin in place to cover raw edges of pocket. Sewing over previous stitching, sew in place along both edges of strip and again through the center stopping stitching approximately 2" from top of bag. Repeat for other side of bag. Sew side seams of bag front and press open.

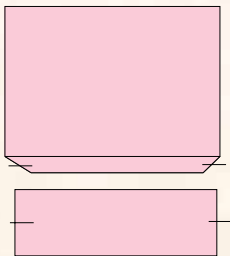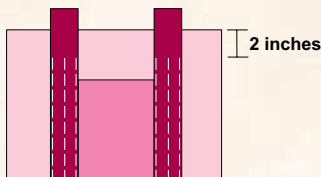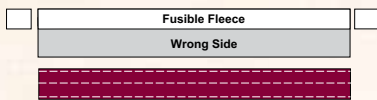


4. Bag bottom: Fuse fleece  $4\frac{1}{2}$ " x  $11\frac{1}{2}$ " rectangle to wrong side of [B]  $4\frac{1}{2}$ " x  $11\frac{1}{2}$ " rectangle. Quilt to match or complement bag fronts. With right sides together, sew fused rectangle into bottom of bag front by matching center of each end of rectangle to each seam of bag front.


Pin; sew together pivoting at each corner of bag bottom. Trim corners of seams at an angle to reduce bulk. Press seams toward bag bottom.

5. Bag lining and inside pockets:

With wrong sides together, fold each [B]  $12\frac{1}{2}$ " x  $15\frac{1}{2}$ " rectangle in half to form two  $6\frac{1}{4}$ " x  $15\frac{1}{2}$ " rectangles. Align raw edges of each pocket with one [A]  $10\frac{1}{2}$ " x  $15\frac{1}{2}$ " rectangle. Pin in place. Stitch 2-3 vertical lines through each pocket to form smaller pockets. Size is your choice – create cell phone pocket, key pocket, comb/mirror pocket, etc. With right sides together, sew lining rectangles together along short sides. Press seams open. (Note: Seams will be on the sides of the bag.) Sew [A]  $4\frac{1}{2}$ " x  $11\frac{1}{2}$ " rectangle into bottom of lining by matching center of each end of rectangle to each seam of lining. Pin; sew together pivoting at each corner of lining bottom. Trim corners of seams at an angle to reduce bulk. Press seams toward bag bottom.

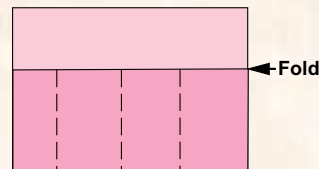

6. With wrong sides together, insert lining into bag front matching side seams. With wrong sides together, fold [B]  $2\frac{1}{2}$ " binding strip in half and press. To cover raw edges at top of bag, attach binding using your favorite method being careful not to catch straps. If desired, use buttons, Velcro® dots, magnets, etc. to close top of bag.

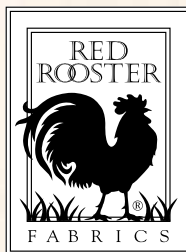

©2010 Red Rooster Fabrics. All rights reserved. Not intended for individual resale. The design for this Red Rooster Fabrics' pattern is protected by U.S. copyright law. Quilt stores: for additional copies of this pattern please call or write Red Rooster Fabrics at the address listed.  
253 West 35th Street, 11th Floor, New York, NY 10001 • 401.728.4200 • [www.redroosterfabrics.com](http://www.redroosterfabrics.com)

We take great care to ensure that the information included in our free pattern is accurate and presented in good faith. No warranty is provided nor results guaranteed. For your convenience, we post an up-to-date listing of corrections on our website: <http://www.redroosterfabrics.com/quilt/oops.php> If a correction is not noted, please contact our customer service department at [info@redroosterfabrics.com](mailto:info@redroosterfabrics.com). You may also call or write us at the address above.