


Primitive Rail Fence Plus – by Ricky Tims



Refer to TheQuiltShow.com, Episode 1013, Segment 1 for video that supports this project.

Fabric Selection:

Select solids or textured solid fabrics. Choose two fabrics to be anchor fabrics throughout – one dark and one zinger

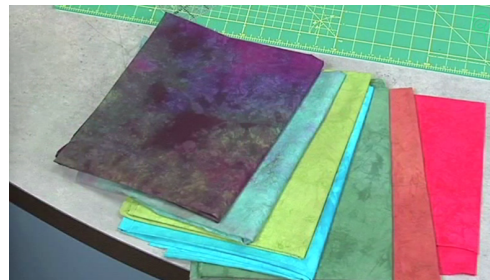


This quilt will be a size of your choosing so you will need to determine the yardage you will need for your project.

Instructions


1. Tear (or cut) strips that are 2" wide (close is good enough) across the goods.
2. Sew strip sets that are four strips wide. Use the dark and the zinger on the outside of the strip set. The two interior fabrics strips can be random. I use a slightly smaller than $\frac{1}{4}$ " seam allowance so the width of my strip set will be almost 7"



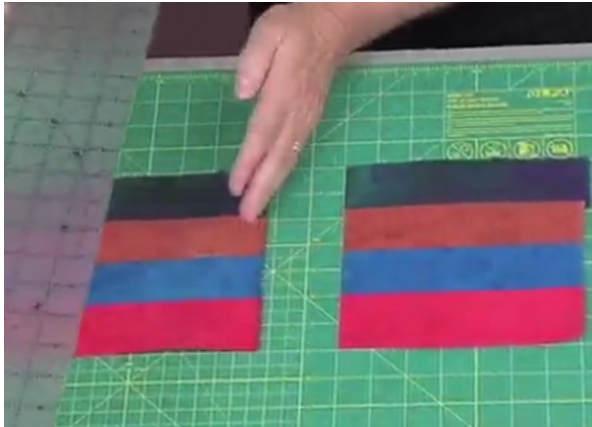

3. Measure the width of your strip sets.
4. Crosscut the strip sets using that measurement. In my case it was 7". They do not need to be perfectly square at this point and the edges can be ragged – it's okay!

5. Take each block and crosscut it on a slight angle, being random with each block.
6. Tear (or cut) 1" strips from your dark fabric.

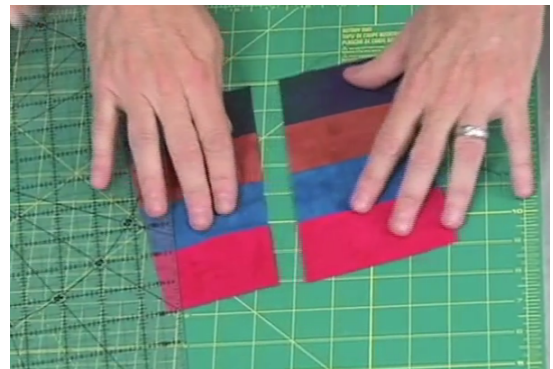

7. Position the strip on the cut edge of the divided block (everything right sides up) and trim the top of the 1" strip so that it is parallel with the top edge of the block.
8. Cut the bottom of the strip parallel as well.
9. Sew the strip into the block as shown.



10. Trim blocks to consistent size
- mine were 6.5"
11. Lay them out alternating
horizontal rails and vertical
rails.
12. Sew all blocks in rows then
join rows to complete the
quilt top.
13. Add borders and quilt the
quilt using your own
preferences.

